





4\* Rubber Feet

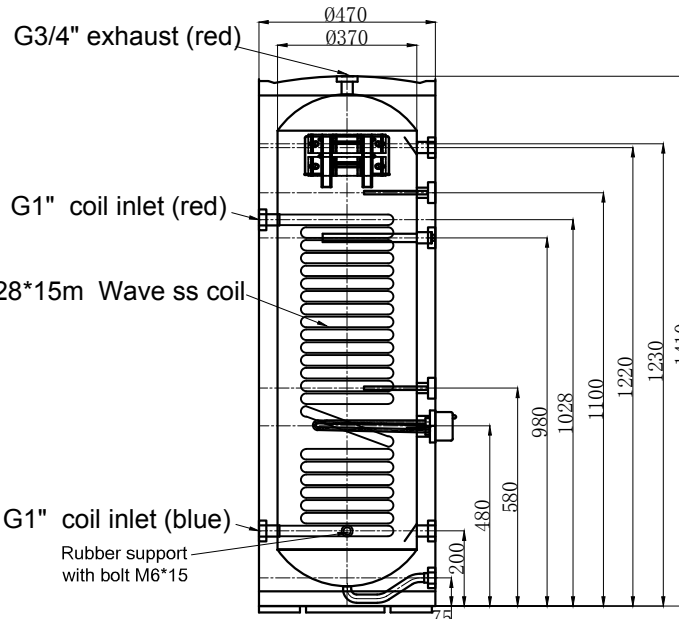

Technical requirements:

1. The diameter of outer tank is  $\phi 470\text{mm}$ ; thickness  $\delta = 0.5\text{mm}$  Galvanized steel with white painting, black cover;
2. The diameter of inner tank is  $\phi 370\text{mm}$ , Duplex  $\delta = 1.5\text{mm}$ ;
3. With 1 set of  $\phi 28 \times 15\text{m}$  SUS316L wave stainless steel;
4. All connections are female;
5. Foam layer 50mm polyurethane.

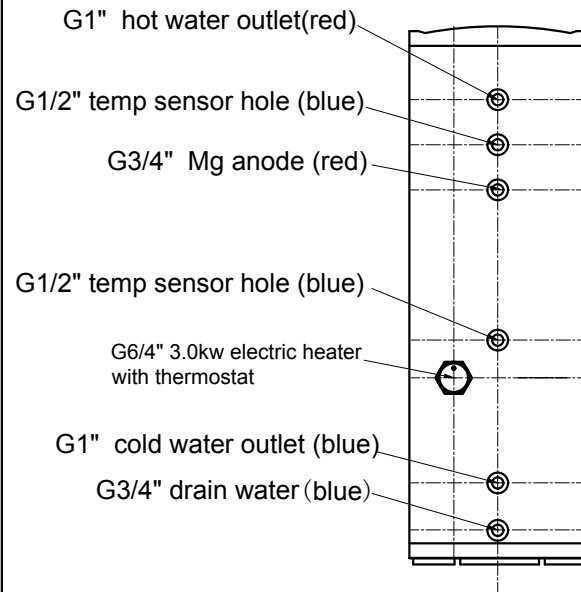

				DHW tank PAWT-150LE1	DATE		20250918	
MARK	REVISION	SIGN	DATE		VERSION	PAGE	RATIO	
				A	1/1	1:1		
				Material	Duplex 1.5mm		SST Heating Energy Co.,Ltd	